

NEW PRODUCT ANNOUNCEMENT


JL AUDIO® M6 LUXE

8" Marine Thin-Line Subwoofer



PRODUCT OVERVIEW

Elevate your marine sound system with the M6 thin-line marine subwoofer. This sleek and stylish 8" subwoofer is easy to install. It features an infinite-baffle design that doesn't require a dedicated enclosure as well as a dog-leg mounting system for placement in a variety of materials — without the need for a backplate. The Concentric Tube Suspension™ design allows for a shallow 3.8" mounting depth, enabling incredible performance — even in the tightest spaces. It's available with magnetically attached round or square grilles that can be painted to seamlessly match your boat's finishes.

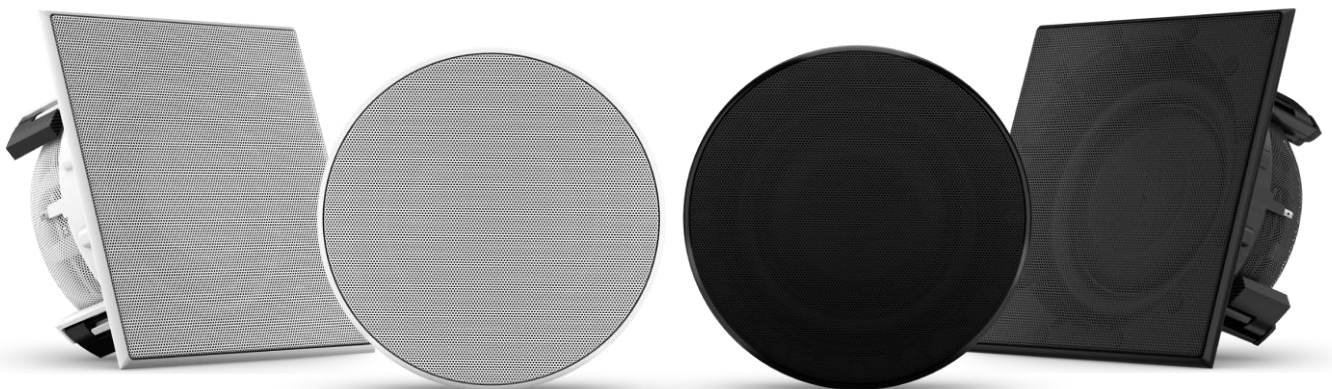

JL AUDIO® M6 LUXE


8" Marine Thin-Line Subwoofer




KEY FEATURES

SHALLOW MOUNT	With a mounting depth of only 3.8", it's easy to add a subwoofer on the exterior of your boat or anywhere inside the cabin.
EASY TO INSTALL	An infinite-baffle design allows for installation without a dedicated enclosure. Our dog-leg mounting system allows for placement in a variety of materials and locations — without the need for a backplate.
LUXE GRILLE	This sleek low-profile grille magnetically attaches to your subwoofer to stay in place — even in rough seas.
REAL MARINE DUTY	For long-term use, all models are built to withstand true saltwater marine environments and deliver years of listening enjoyment.
CONCENTRIC TUBE SUSPENSION™ DESIGN	Our unique Concentric Tube Suspension design allows the motor system to be placed higher in the cone body — compressing subwoofer depth while still permitting excellent mechanical excursion.
DMA- OPTIMISED DESIGN	Proprietary motor, suspension and cone modeling systems are used to achieve long, linear excursion capabilities with low distortion and powerful sound output. The result is tight, clean, articulate bass performance at all power levels.

PRODUCT CONFIGURATIONS



INCLUDES			COUNTRY OF ORIGIN		
Round M6 thin-line subwoofer, grille removal tool, mounting template and documentation			Assembled in the U.S. with global components.		
DESCRIPTION	SKU	UPC	RRP	TYPE OF DISTRIBUTION	MARKETPLACE BAN
JL Audio M6 Marine Thin-Line Subwoofer 8" with Round, White Luxe Grille	010-03875-00	753759367282	€799.99	Exclusive	Yes



INCLUDES			COUNTRY OF ORIGIN		
Square M6 thin-line subwoofer, grille removal tool, mounting template and documentation			Assembled in the U.S. with global components.		
DESCRIPTION	SKU	UPC	RRP	TYPE OF DISTRIBUTION	MARKETPLACE BAN
JL Audio M6 Marine Thin-Line Subwoofer 8" with Square, White Luxe Grille	010-03875-01	753759367299	€799.99	Exclusive	Yes



INCLUDES			COUNTRY OF ORIGIN		
Round M6 thin-line subwoofer, grille removal tool, mounting template and documentation			Assembled in the U.S. with global components.		
DESCRIPTION	SKU	UPC	RRP	TYPE OF DISTRIBUTION	MARKETPLACE BAN
JL Audio M6 Thin-Line Mount Subwoofer 8" with Round, Black Luxe Grille	010-03875-10	753759372224	€799.99	Exclusive	Yes



INCLUDES			COUNTRY OF ORIGIN		
Square M6 thin-line subwoofer, grille removal tool, mounting template and documentation			Assembled in the U.S. with global components.		
DESCRIPTION	SKU	UPC	RRP	TYPE OF DISTRIBUTION	MARKETPLACE BAN
JL Audio M6 Marine Thin-Line Subwoofer 8" with Square, Black Luxe Grille	010-03875-11	753759372231	€799.99	Exclusive	Yes

PHYSICAL SPECIFICATIONS

General	Sizes	8" round/8" square
	Colour	Luxe Satin White Luxe Satin Black
	Physical dimensions (diameter)	10" (254 mm)
	Physical dimensions (depth)	8" round: 4.2" (107 mm) 8" square: 4.1" (105 mm)
	Weight	7.5 lbs (3.4 kg)
	Water and dust rating	IPX5
	Speaker type	Infinite baffle
	Continuous power handling (RMS)	125 watts
	Sensitivity (SPL at 1 watt/1 meter)	83.2 decibels
	Nominal impedance	8 ohms
	Recommended amplifier power (RMS)	50–250 watts
	LED supply voltage	10–14.4 VDC
	Cone material	Injection-moulded, mica-filled polypropylene
	Warranty	3 years
Electrical Features	Compass-safe distance	93" (235 cm)
Connections	Speaker connections	Spade connectors
Mounting Dimensions	Mounting depth clearance	3.8" (97 mm)
	Frontal grille protrusion	8" round: 0.4" (10 mm) 8" square: 0.3" (9 mm)
	Mounting hole	8.96" (229 mm)
Parameters	Free air resonance (Fs)	37.98 Hz
	Electrical "Q" (Qes)	0.731
	Mechanical "Q" (Qms)	9.471
	Total "Q" (Qts)	0.679
	Equivalent Compliance (Vas)	0.61 cubic feet (17.31 L)
	One-way linear excursion (Xmax; specs are derived via one-way voice coil overhang method with no correction factors applied)	0.40" (10 mm)
	Effective piston area (SD)	32.705 in ² (0.0211 m ²)
	DC resistance (RE)	7.24 ohms
Sealed Enclosure Specifications	Volume (net int.)	1.66 cubic feet (47 L)

PACKAGING SPECIFICATIONS

	ROUND	SQUARE
GIFT BOX DIMENSIONS (WXHxD)	11.8" x 13" x 5.4" (298 x 330 x 137 mm)	11.8" x 13" x 5.4" (298 x 330 x 137 mm)
GIFT BOX WEIGHT	8.2 lbs (3.7 kg)	8.2 lbs (3.7 kg)
MASTER CARTON DIMENSIONS (WXHxD)	12.3" x 13.5" x 12" (311 x 343 x 305 mm)	12.3" x 13.5" x 12" (311 x 343 x 305 mm)
MASTER CARTON WEIGHT	17.8 lbs (8.1 kg)	17.8 lbs (8.1 kg)
MASTER CARTON QUANTITY	2	2